


200A Insulated Cap WJM 15/200


Application

Used as a temporary or permanent cover on an energized operating interface. Standard product has an insulating cuff.

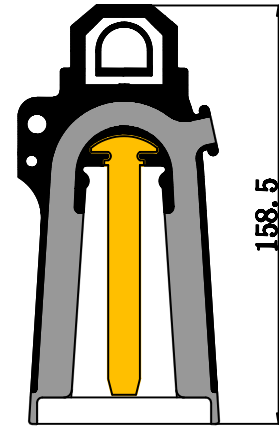

Dimension: mm

M.O.A Elbow Surge Arrester

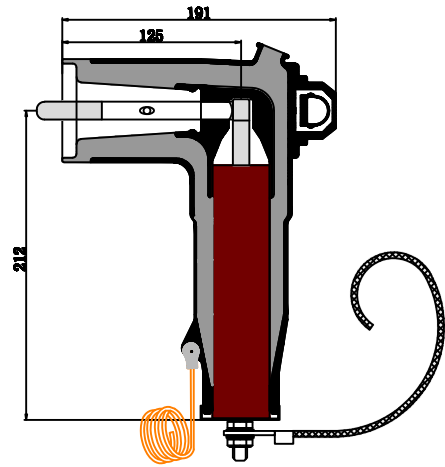

Dimension: mm

Technical Data

Item	WAZT-BLQ-17/45	WAZT-BLQ-17/50
System Nominal Voltage(kV)	15	15
Rated Voltage	17	17
Nominal Discharge current(kA)	5	5
Continuous Operation Voltage (kV)	13.6	13.6
Steep Current Impulse Residual Voltage (kV)	≤51.8	≤57.5
Lightning Impulse Residual Voltage(kV)	≤45	≤50
Switching Impulse Residual Voltage(kV)	≤35	≤42.5
Long Duration Current Impulse Withstand(A)	150	150
High Current Impulse Withstand (kA)	65	65